



STOPPER PLUG



KTK SERIES

TECHNICAL DETAILS

Type	: KTK TYPE STOPPER PLUG
Protection code	: I M2 Ex db I Mb / I M2 Ex eb I Mb II 2G Ex db IIC Gb / II 2G Ex eb IIC Gb II 1D Ex ta IIC Da
Certificate	: IEP 20 ATEX 756 U
Material	: MS58 Brass with nickel plated Stainless steel AISI316L / Aluminium
Standards	: EN 60079-0:2012, 60079-7:2007, 60079-1:2007 60079-31:2009
O-ring	: Silicone
Protection class	: IP66
Temperature	: -40 °C +100 °C
Application area	: ZONE1, ZONE2, ZONE21, ZONE22, Gas Group IIA, IIB, IIC

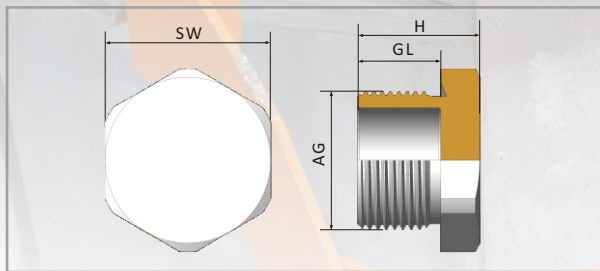

PRODUCT DEFINITION

K	TK	X	X	X
Brand	Series	Material Type	Seal type	Product Size
K-KHJ	TK-TK Type Stopper Plug	N-MS58 Brass with nickel plated Ss-AISI316L Stainless Steel A-Aluminium	2-Silicone O-ring	M12-M12 x 1,5 M12-M12 x 1,5 M16-M16 x 1,5 ...

STOPPER PLUG SELECTION TABLE


Product Size	Product Code	Thread length "GL" min. (mm)	H mm	SW mm
M12 x 1,5	KTK-X2-M12	15	22	17
M16 x 1,5	KTK-X2-M16	15	22	22
M20 x 1,5	KTK-X2-M20 ★	15	22	24
M25 x 1,5	KTK-X2-M25 ★	15	22	30
M32 x 1,5	KTK-X2-M32	15	22	36
M40 x 1,5	KTK-X2-M40	15	22	45
M50 x 1,5	KTK-X2-M50	15	22	55
M63 x 1,5	KTK-X2-M63	15	22	70
M75 x 1,5	KTK-X2-M75	15	22	80
M90 x 2	KTK-X2-M90	20	27	95
M100 x 2	KTK-X2-M100	20	27	110
NPT 1/4"	KTK-X-N1/4	15	22	15
NPT 3/8"	KTK-X-N3/8	15	22	20
NPT 1/2"	KTK-X-N1/2	15	22	24
NPT 3/4"	KTK-X-N3/4 ★	15	22	27
NPT 1"	KTK-X-N100	15	22	35
NPT 1 1/4"	KTK-X-N1 1/4	18	25	45
NPT 1 1/2"	KTK-X-N1 1/2	18	25	50
NPT 2"	KTK-X-N200	18	25	65
NPT 2 1/2"	KTK-X-N2 1/2	28	35	75
NPT 3"	KTK-X-N300	28	35	90
NPT 4"	KTK-X-N400	28	35	115

Remark: ★ Stand for this specification is a standing stock .

STOPPER PLUG



PRODUCT DEFINITION

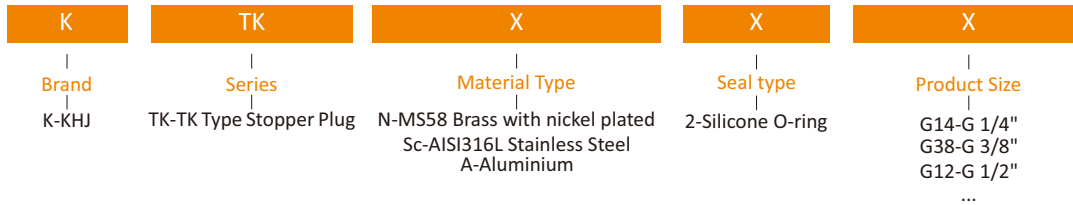

STOPPER PLUG SELECTION TABLE

Product Size	Product Code	Thread length "GL" min. (mm)	H mm	SW mm
G 1/4"	KTK-X2-G14	15	22	18
G 3/8"	KTK-X2-G38	15	22	22
G 1/2"	KTK-X2-G12	15	22	25
G 3/4"	KTK-X2-G34	15	22	32
G 1"	KTK-X2-G100	15	22	38
G 1 1/4"	KTK-X2-G114	15	22	45
G 1 1/2"	KTK-X2-G112	15	22	55
G 2"	KTK-X2-G200	15	22	65
G 2 1/2"	KTK-X2-G212	20	27	85
G 3"	KTK-X2-G300	20	27	95
G 4"	KTK-X2-G400	20	27	120
PG7	KTK-X2-P7	15	22	17
PG9	KTK-X2-P9	15	22	20
PG 11	KTK-X2-P11	15	22	25
PG 13,5	KTK-X2-P13	15	22	25
PG16	KTK-X2-P16	15	22	27
PG21	KTK-X2-P21	15	22	35
PG29	KTK-X2-P29	15	22	42
PG36	KTK-X2-P36	15	22	55
PG42	KTK-X2-P42	15	22	60
PG48	KTK-X2-P48	15	22	65

Contact

SHENZHEN KHJ SEMICONDUCTOR LIGHTING CO., LTD.

Address: 4-5 Floor, Building 1,Chuangxin industrial park,Xintian community,Guanlan, Longhua new district, Shenzhen ,China.

Tel: +86-755-82949977

E-mail: khjledsales@khj.cn

Fax: +86-755-82949800

Web: www.khjled.com