



LED Explosion Proof Light

**UL Certified LED Floodlight/High bay light in Hazardous Area.
Polarbear Series**

Class I Division 2, Group A,B,C,D
UL844;UL1598A;UL1598



Features And Benefits:

- High efficacy LED Source with long lifespan, L70 > 100,000 hours @ 25°C ambient
- 5-year performance warranty
- Low THD around 10%, Less interference
- 4KV/Line-Line 6KV/Line-Earth
- Robust aluminium housing and strong tempered glass
- Vibration and shock resistant
- Low maintenance

Applications:



Oil&Gas Exploration



Drilling



Oil Refinery



Petrochemical Plant



Power Plant



Pharmaceutical Plant

UL Certified LED Floodlight/High bay light in Hazardous Area.

LED Floodlight/High bay light

Standard & Certificate:

Certificate:	•UL Certification NO.:20170823- E491372 •CE	•ABS •RoHS
Executive Standard:	•UL 1598 •UL 1598A •UL 844 •UL 8750	•CSA C22.2 No.137-M1981 •CSA C22.2 No.250.1-08 •CSA C22.2 No.250.13 •CSA C22.2 No.250.13-14
Divivision:	•Class I Division 2,Group A, B ,C ,D	


Electrical & Photometric Features:

Luminaire Efficacy:	147lm/W
Lifespan:	>100,000 hours
Operating Voltage:	100-277 VAC 141-392 VDC
Power:	80W/120W/150W/200W/240W
Frequency:	50/60Hz
Power Factor:	>0.98
THD:	<10%
Insulation Class:	I
Surge Protection:	4KV/6KV
LED Driver:	Over voltage protection/short circuit protection

Mechanical Features:

Weight:	7.3Kg(80W)/11Kg(120W,150W)/18.4Kg(200W,240W)
Size:	210*400*161mm(80W)/260*400*161mm(120W,150W) 500*400*161mm(200W,240W)
Ambient Temperature:	-40℃--+50℃
Connecting Terminals:	3*1.0-4mm ² (L+N+PE)
Cable Entries:	1XNPT 3/4" (M20*1.5, M25*1.5 are optional)
Earthing Protection:	M4 (Internal & external earth bolts)
IP Code:	IP66
Enclosure Material:	Copper-free Aluminium
Enclosure Colour:	Grey RAL7040
Coating:	Epoxy powder coating
Exposed Fastener:	Stainless steel
Protective Cover:	Tempered glass,Stand 7J impact

Production Definition

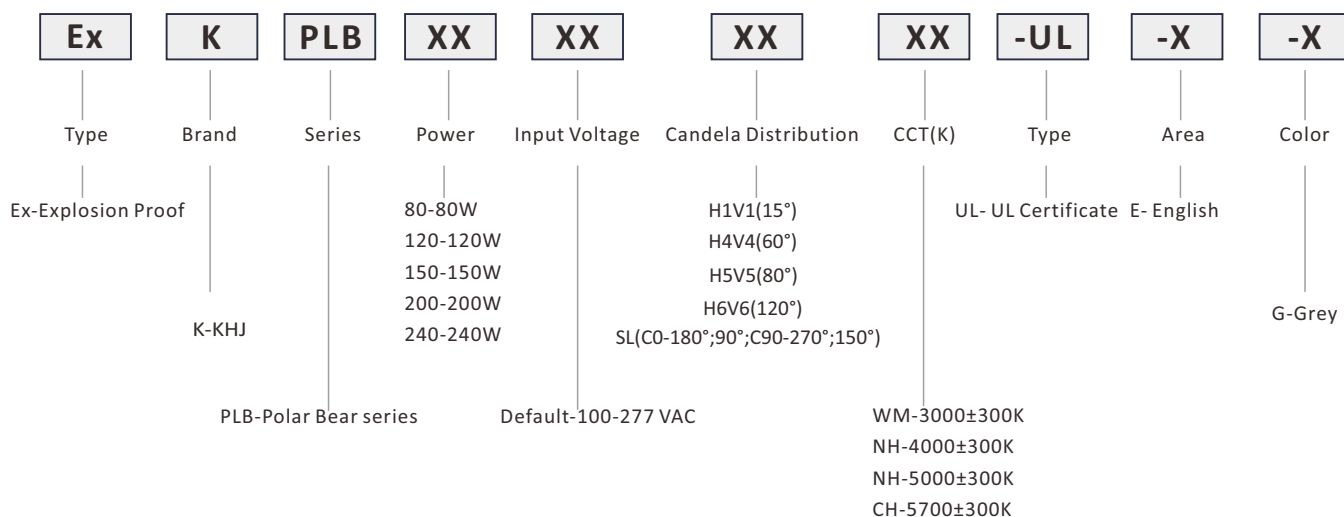


Ordering information



P/N	Operating Voltage(V)	Luminous Flux(lm)	Power(W)	CRI	Color Temp.	CCT(K)	Class I, Division 2 Groups A,B,C,D		
							-40°C to 40°C	-40°C to 45°C	-40°C to 50°C
Ex-KPLB80*WM-UL-E-G	100-277 AC (141-392 DC)	10920	80	70	Warm white	3000±300	T4A	T4A	T4A
Ex-KPLB80*NH-UL-E-G		11760	80	70	Natural white	4000±300	T4A	T4A	T4A
Ex-KPLB80*NH-UL-E-G		11760	80	70	Natural white	5000±300	T4A	T4A	T4A
Ex-KPLB80*CH-UL-E-G		11760	80	70	Cool white	5700±300	T4A	T4A	T4A
Ex-KPLB120*WM-UL-E-G		16380	120	70	Warm white	3000±300	T4A	T4A	T4
Ex-KPLB120*NH-UL-E-G		17640	120	70	Natural white	4000±300	T4A	T4A	T4
Ex-KPLB120*NH-UL-E-G		17640	120	70	Natural white	5000±300	T4A	T4A	T4
Ex-KPLB120*CH-UL-E-G		17640	120	70	Cool white	5700±300	T4A	T4A	T4
Ex-KPLB150*WM-UL-E-G		21840	150	70	Warm white	3000±300	T4A	T4A	T4
Ex-KPLB150*NH-UL-E-G		23520	150	70	Natural white	4000±300	T4A	T4A	T4
Ex-KPLB150*NH-UL-E-G		23520	150	70	Natural white	5000±300	T4A	T4A	T4
Ex-KPLB150*CH-UL-E-G		23520	150	70	Cool white	5700±300	T4A	T4A	T4
Ex-KPLB200*WM-UL-E-G		27300	200	70	Warm white	3000±300	T4A	T4	/
Ex-KPLB200*NH-UL-E-G		29400	200	70	Natural white	4000±300	T4A	T4	/
Ex-KPLB200*NH-UL-E-G		29400	200	70	Natural white	5000±300	T4A	T4	/
Ex-KPLB200*CH-UL-E-G		29400	200	70	Cool white	5700±300	T4A	T4	/
Ex-KPLB240*WM-UL-E-G		32760	240	70	Warm white	3000±300	T4A	T4	/
Ex-KPLB240*NH-UL-E-G		35280	240	70	Natural white	4000±300	T4A	T4	/
Ex-KPLB240*NH-UL-E-G		35280	240	70	Natural white	5000±300	T4A	T4	/
Ex-KPLB240*CH-UL-E-G		35280	240	70	Cool white	5700±300	T4A	T4	/

Remarks: 1.* Stands for beam angle,including H1V1 / H4V4 / H5V5 / H6V6 / SL;
2.For Beam angle H1V1,H4V4 and H5V5,the luminous flux will be 15% less;
For Beam angle SL the luminous flux will be 30% less.
3.SL beam angle is only applicable for 80W&120W.



Candela Distribution

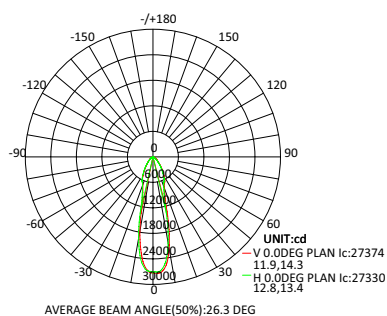


H1V1(15°)/High efficacy LED Source

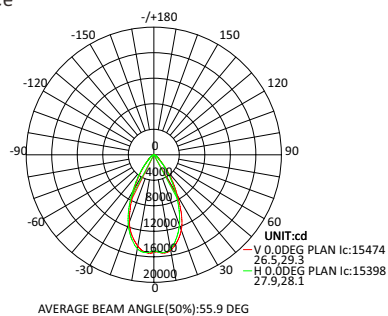



H4V4(60°)/High efficacy LED Source

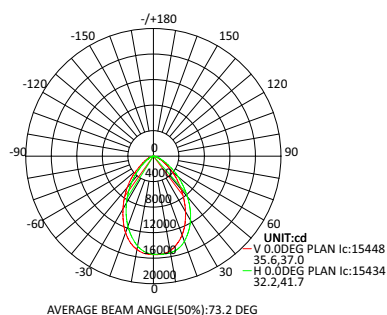


H5V5(80°)/High efficacy LED Source

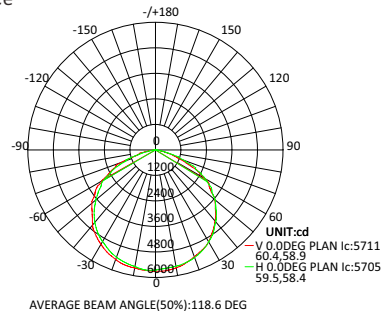

H6V6(120°)/High efficacy LED Source

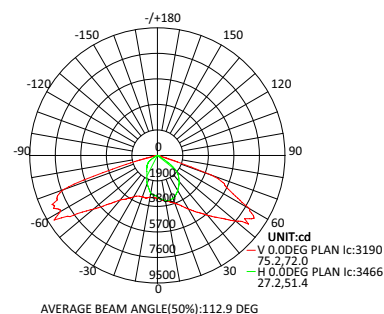


SL/High efficacy LED Source




Installation Method


Stanchion Mount:

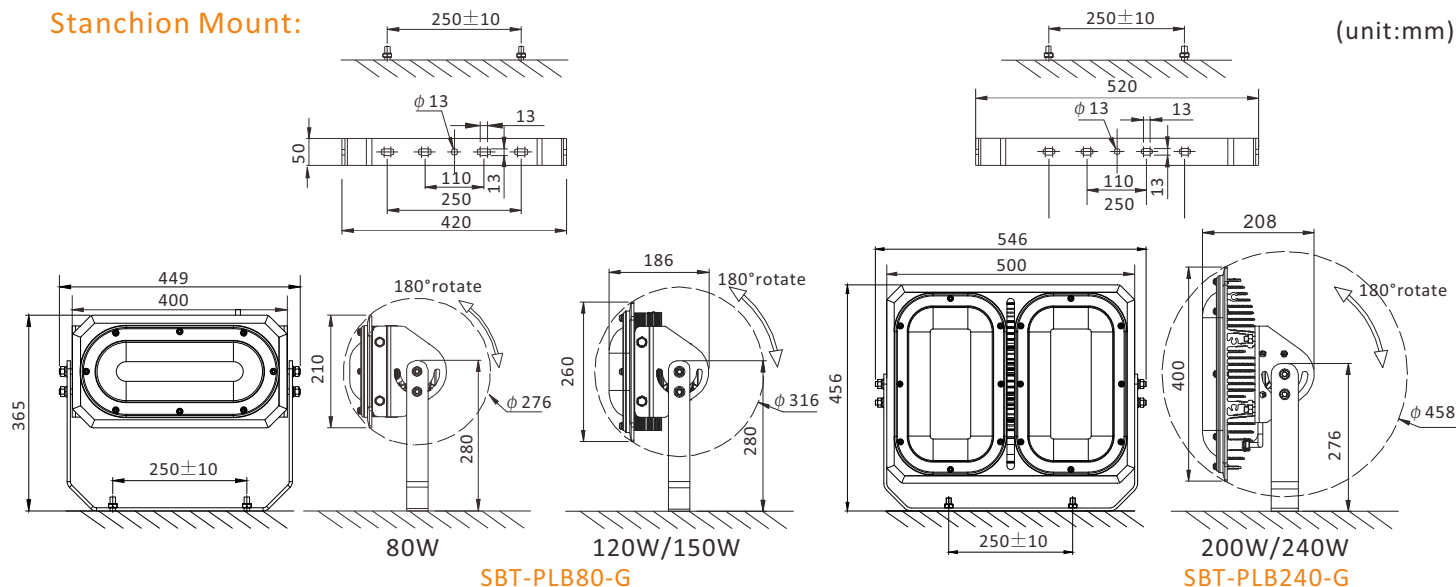

Pole Mount:

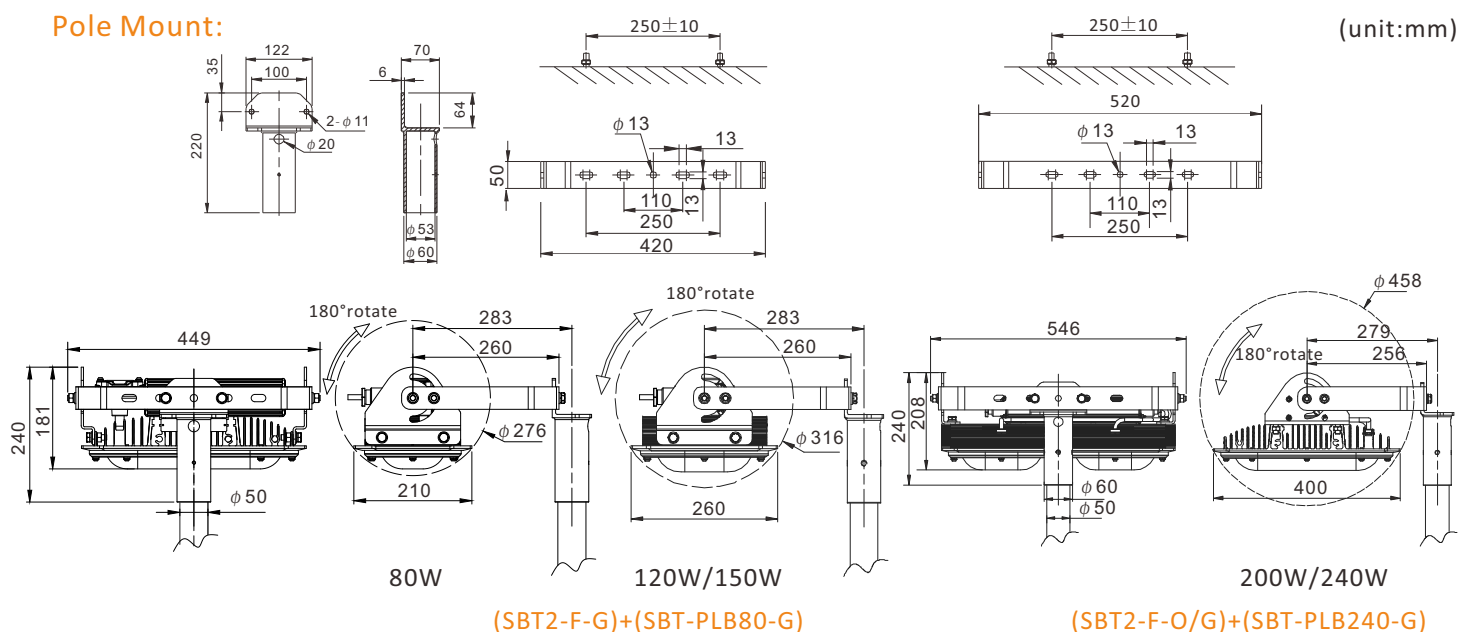


Pendant Mount:

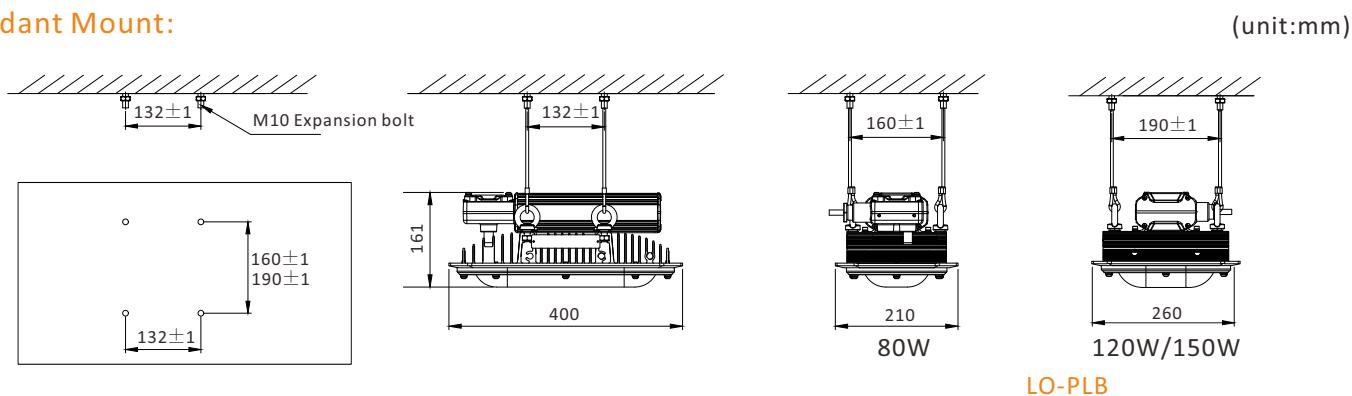

Installation Method

Pendant Mount:

(unit:mm)

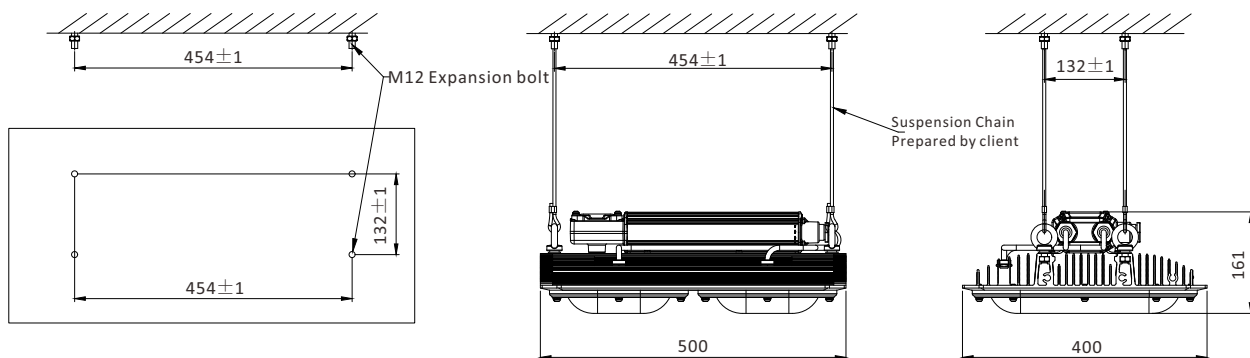


200W/240W

LO-PLB

Pipe Clamp:



(unit:mm)

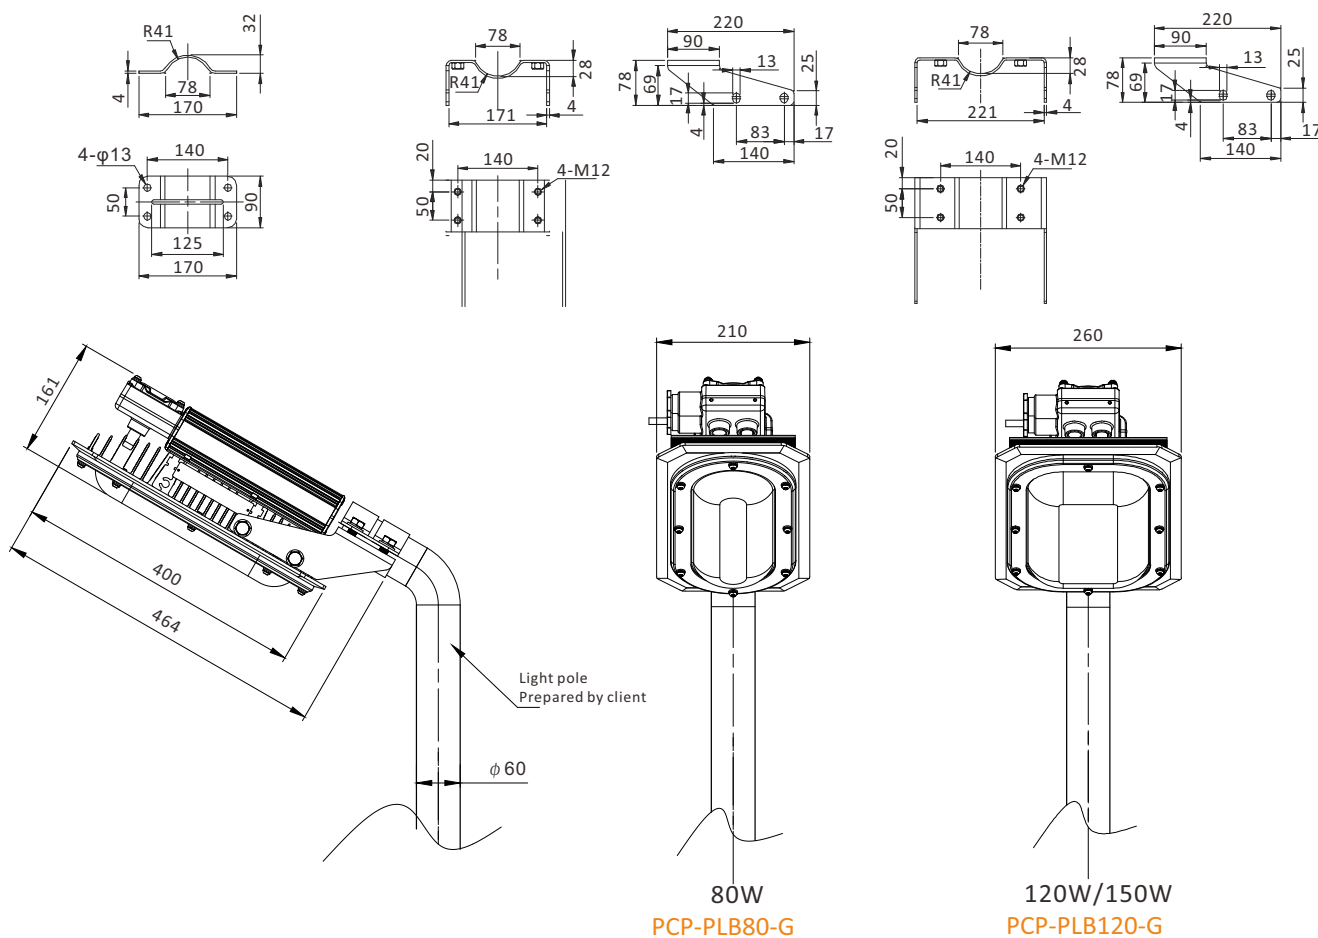

80W
PCP-PLB80-G

120W/150W
PCP-PLB120-G

Optional Parts

No.	Installation accessories	Part No.	Picture	Material	Weight(Kg)	QTY	Remark
1	Pipe clamp	PCP-PLB80-G		Q235	2.1	1	Pipe clamp (80W)
2	Pipe clamp	PCP-PLB120-G		Q235	2.3	1	Pipe clamp (120W/150W)
3	Loop	LO-PLB		45#	0.2	4	Pendant mount (200W/240W)
4	Stanchion Bracket	SBT-PLB80-G		Q235	4	1	Wall mount Stanchion mount (80W/120W/150W)
5	Stanchion Bracket	SBT-PLB240-G		Q235	4.3	1	Wall mount Stanchion mount (200W/240W)
6	pole mount bracket	SBT2-F-G SBT-PLB80-G		Q235	5.63	1	Pole mount (80W/120W/150W)
7	pole mount bracket	SBT2-F-G SBT-PLB240-G		Q235	5.83	1	Pole mount (200W/240W)
8	Guard-1	GU-PLB80-MC		SUS304	0.3	1	(80W)
9	Guard-2	GU-PLB120-MC		SUS304	0.35	1	(120W/150W)
		GU-PLB240-MC			0.7	1	(200W/240W)