



LED Explosion Proof Mobile Light

**ATEX & IECEx Certified LED Mobile light in Hazardous Area.
Saturn Series**

 II 2G Ex d e IIC T5 Gb IP54





Features And Benefits:

- High efficacy LED Source with long lifespan, L70 > 100,000 hours @ 25°C ambient
- 5 years warranty for led light, 18 months warranty for the battery
- C/W a dimmer, can adjust the power from 5W to 60W
- C/W battery level indicator function
- Robust aluminium housing and strong tempered glass
- Vibration and shock resistant
- Low maintenance

Applications:



Oil & Gas Exploration



Drilling



Oil Refinery



Petrochemical Plant



Power Plant



Pharmaceutical Plant



ATEX & IECEx Certified LED Mobile light in Hazardous Area.

LED Mobile light

Standard & Certificate:

Ex Mark:	Gas: Ⓜ II 2G Ex d e IIC T5 Gb IP54
Certificate:	<ul style="list-style-type: none"> • ATEX Certification NO.:ECM 17 ATEX-B TD45 • IECEx Certification NO.:IECEx CQM 16.0005X • CE • RoHS
Executive Standard:	<ul style="list-style-type: none"> • (IEC)EN 60079-0, (IEC)EN 60079-1, (IEC)EN 60079-7 • EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3 • EN 60598-1, EN 60598-2-5, EN 62031, EN 62493 • IEC 62321-4, IEC 62321-5, IEC 62321-6 • IEC 62321-7-1, IEC 62321-7-2, IEC 62321-8
Classification:	<ul style="list-style-type: none"> • Group II Zone 1


Electrical & Photometric Features:

Luminaire Efficacy:	126lm/W
Lifespan:	>100,000 hours
Charge Voltage:	100-277 VAC,141-392 VDC
Power:	5W-60W
Battery Rated Capacity:	12Ah
Battery Type:	Lead-acid batteries
Rated Lifespan:	300 Cycles
Battery Back Up:	12 h(15W) 8 h(30W) 4 h(60W)
Battery Charge Time: (after full discharge)	12 h-14h
Frequency:	50/60Hz
Insulation Class:	I
LED Driver:	Over voltage protection/short circuit protection

Mechanical Features:

Weight:	18Kg
Size:	695*350*218mm
Ambient Temperature:	-20°C-+55°C
Earthing Protection:	M4 (Internal & external earth bolts)
IP Code:	IP54
Enclosure Material:	Die-casting aluminium alloy
Enclosure Colour:	Orange,RAL2011
Coating:	Epoxy powder coating
Exposed Fastener:	Stainless steel
Protective Cover:	Tempered glass,Stand 7J impact


Production Definition

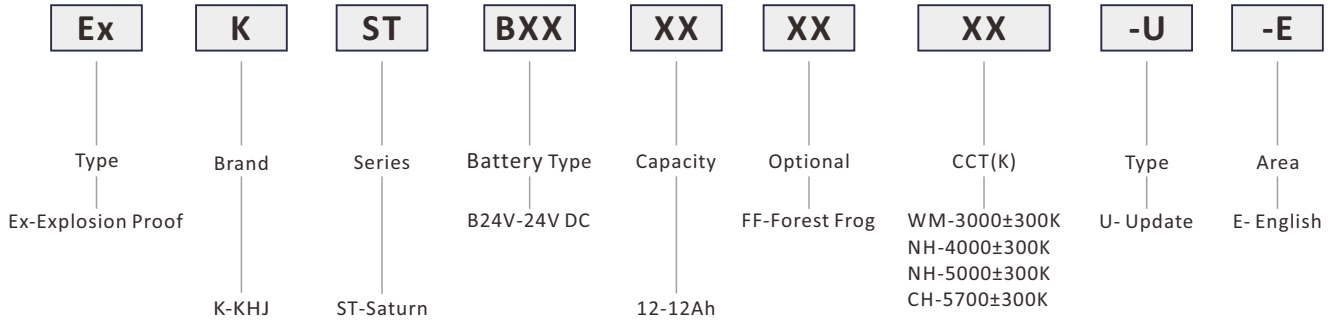

Ordering Information

P/N	Operating Voltage(V)	Color Temp.	CCT(K)	Power(W)	CRI	Luminous Flux(lm)	Temp. Classification
							-20°C~+55°C
Ex-KSTB24V12FFWM-U-E	100~277 AC (141~392 DC)	Warm white	3000±300	15	70	1740	T5
				30	70	3480	
				60	70	6950	
Ex-KSTB24V12FFNH-U-E		Natural white	4000±300	15	70	1890	
				30	70	3780	
				60	70	7560	
Ex-KSTB24V12FFNH-U-E		Natural white	5000±300	15	70	1890	
				30	70	3780	
				60	70	7560	
Ex-KSTB24V12FFCH-U-E		Cool white	5700±300	15	70	1890	
				30	70	3780	
				60	70	7560	

Candela Distribution

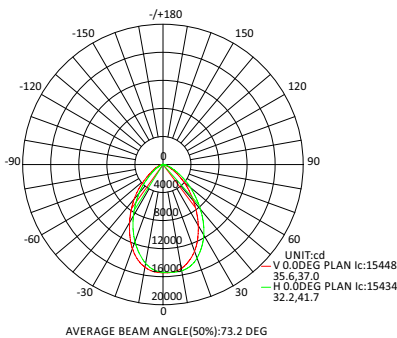

H5V5(80°)/High efficacy LED Source



Size

